

# **Mi • Light<sup>®</sup>**


## **User Instruction**

**5 IN 1 Smart LED Controller**

Model No.: LS2

# Introduction

5 in 1 (Single Color&CCT&RGB&RGBW&RGB+CCT) smart strip controller is our newly developed high-end LED controller controlled by wireless remote controller, also with smart phone control and 4G long distance control (need WiFi box). The controller has auto-transmitting and auto-synchronizing function and with brightness, CCT, RGB, RGBW and RGB+CCT output mode. This controller adopt the widely used 2.4GHz wireless technology with the features of low power consumption, long signal transmitting and strong anti-interference,etc. One compatible remote control many controllers at the same time. Widely used on the controlling of hotel lighting and home lighting.

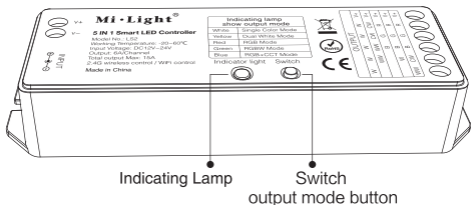

## Indicating lamp showing instruction

Indicating Lamp Color	Output Mode
White Light	Single Color Mode
Yellow Light	Dual White Mode
Red Light	RGB Mode
Green Light	RGBW Mode
Blue Light	RGB+CCT Mode

# Technical Data

Model No.: LS2

Input Voltage: DC12V~24V

Output: 6A/Channel

Total Output Max: 15A


Weight: 60g

Working Temperature: -20~60°C

Control Distance: 30m

Connection: Common anode

Size: 124\*38\*23mm

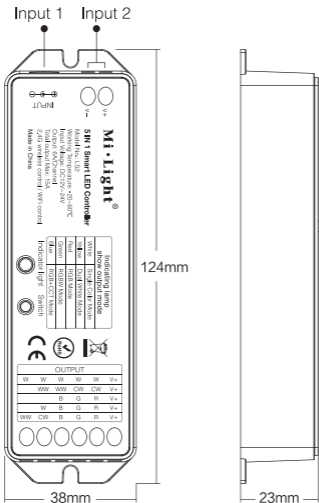

## Link&Unlink (Just for FUT089 Remote Controller)


### Link :

Turn off the power, then turn on again after 5 seconds, Press " | " 3 times within 3 seconds. The LED light blinks 3 times slowly when it is done.

### Unlink:

Turn off the power, then turn on again after 5 seconds, Press " | " button 5 times within 3 seconds. The LED light blinks 10 times swiftly when it is done.

**Remark: Compatible with below remote controller (purchasing separately)**

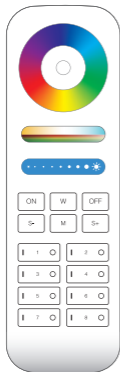

Model No.: FUT089  
8-Zone Remote controller




Model No.: B8  
8-Zone Panel Remote Controller  
**link/unlink method see details on B8 instruction**

# Auto-synchronization function

Different controllers can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed.




## Remark:

1.  Indicating Auto-transmitting.
2. Controller will be auto-synchronizing in the same dynamic modes and within 30m controlling distance.

# Auto-transmitting Diagram

One strip controller can transmit the signals from the remote control to another controller within 30m, as long as there is a strip controller within 30m, the remote control distance can be limitless.

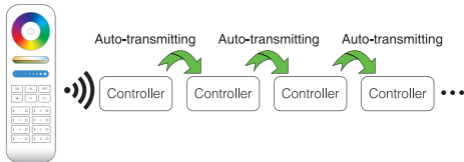


## Dynamic Mode Sheet


Saturation Adjustable both on static and dynamic mode.

Number	Dynamic mode		Brightness & Speed
	Brightness, Color Temperature	RGB / RGBW / RGB+CCT	
1	White gradual change	colors gradual change	Adjustable
2	White jump to change	White gradual change	
3	White Gradual + Jump to change	RGB color gradual change	
4	NC	7 colors jump to change	
5	NC	Random jump to change	
6	NC	RED Gradual + Jump to change	
7	NC	Green Gradual + Jump to change	
8	NC	Blue Gradual + Jump to change	
9	NC	White Gradual + Jump to change	


# Controller connect to LED strip diagram

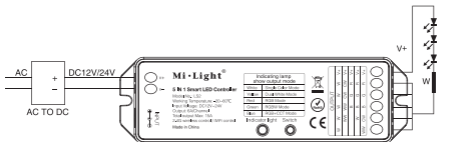


Controller connect to Single Color LED strip diagram

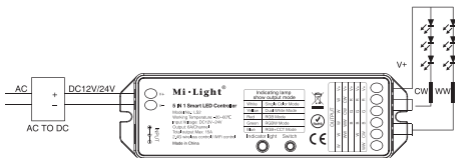


Controller connect to CCT LED strip diagram

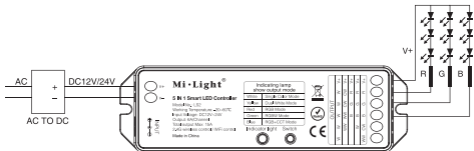

Controller connect to RGB LED strip diagram

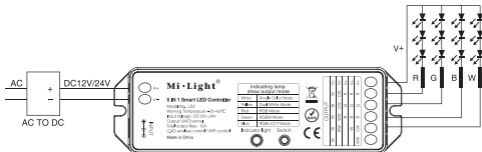

Controller connect to RGBW LED strip diagram

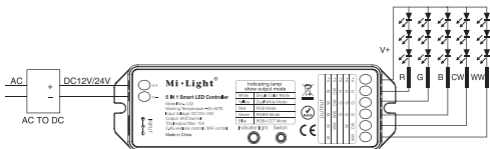

Controller connect to RGB+CCT LED strip diagram

## Attention

1. Please check whether the input voltage of the constant voltage power supply is in accordance with the controller, and please check the connection of both the cathode and anode, otherwise the controller will be broken.
2. Please don't connect wires with power on.  
Please turn on again only when it is in right connection and no short circuit.
3. Please do not use the controller in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected .



Made in China