


## LED module 30X5630CC400X40

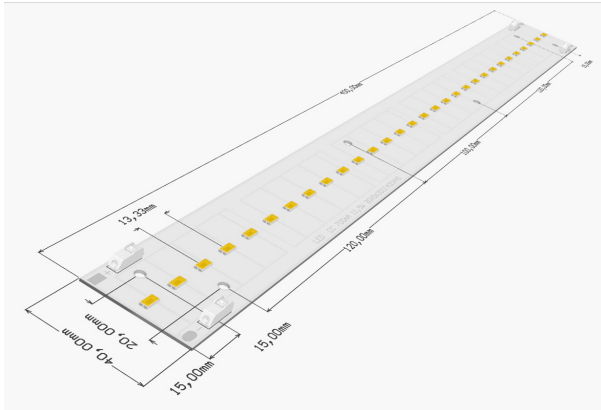

<b>Brightness:</b>	1650 lm
<b>Power:</b>	11 W
<b>Distance between LED:</b>	13.33 mm
<b>Lenght :</b>	400 mm

### Basic info

- GOMAR PLUS production
- PCB - FR4
- highest quality LEDs (OSRAM, CREE, SAMSUNG etc.)
- constant current power supply
- perfect light source for LED linear luminaires
- dimensions according to global standards
- high luminous flux, efficacy, lifetime, good colour repeatability
- our own SMD production line - we can customize all parameters according to customer demands



## Technical parameters

Variant	Cool white W 5000K	Neutral white NW 4000K	Warm white WW 3000K
Brightness	1650 lm	1650 lm	1600 lm
Power	11 W		
Current	700 mA		
Voltage	14.0 - 16.0 V DC		
Distance between LED	13.33 mm		
Length	400 mm		
Width	40 mm		
Height	2 mm		
Beam angle	120 °		
Color rendering index (Ra)	80 Ra		
IP degree	20 IP		
Type of electrical supply	Constant Current		

## Technical drawing

