


KT MH 8860 zoomer 3W

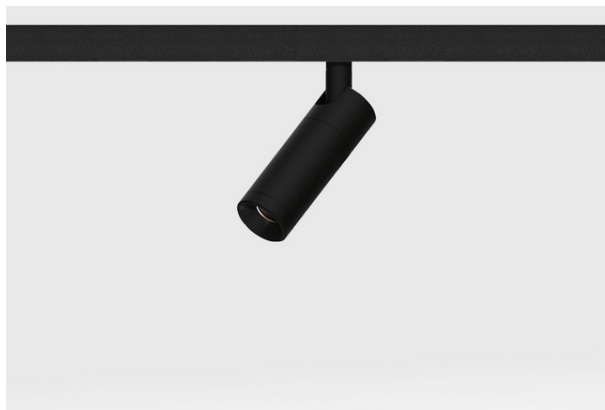

Max power:	3 W
-------------------	-----

Max luminous flux:	110 lm
---------------------------	--------

Basic info

Spotlight luminaire, mounted on a magnetic 48 V low voltage track.

Housing: die-cast aluminium, powder coated, RAL color. Microstructure finish.

Optic: set of glass lenses, shaping the light distribution. Variable beam angle 8-25°.

Power supply: 48 V DC, no flickering, integrated in the luminaire.

Technical parameters

IP degree	20 IP
L80B10 lifetime	50000 h
Max power	3 W
Max luminous flux	110 lm
Input Voltage	48V DC
Power-supply	on/off or DALI
CCT	2700K, 3000K, 4000K, 5000K, 6000K
Beam angle	Zoom 8° - 25°

Technical drawing

