


## KT MH 886... zoomer 5 - 10W

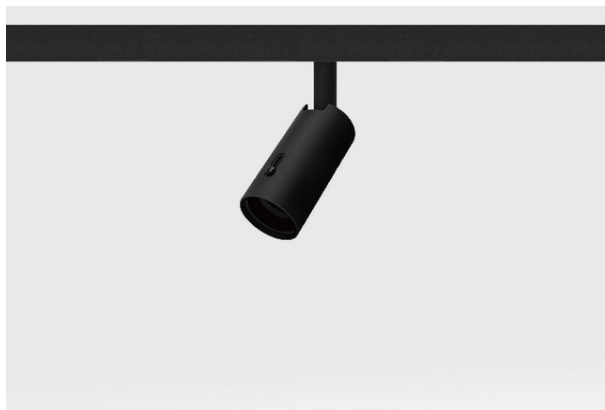

<b>Max power:</b>	10 W
-------------------	------

<b>Max luminous flux:</b>	325 lm
---------------------------	--------

### Basic info

**The price relates to 5W version, for other prices please check the table at the bottom of the page.**

Spotlight luminaire, mounted on a magnetic 48 V low voltage track.

**Housing:** die-cast aluminium, powder coated, RAL color. Microstructure finish.

**Optic:** set of glass lenses, shaping the light distribution. Variable beam angle 18-35°.

**Power supply:** 48 V DC, no flickering, integrated in the luminaire.

## Technical parameters

IP degree	20 IP
L80B10 lifetime	50000 h
Max power	10 W
Max luminous flux	325 lm
Input Voltage	48V DC
Power-supply	on/off or DALI
CCT	2700K, 3000K, 4000K, 5000K, 6000K
Beam angle	Zoom 18° - 35°

## Technical drawing

