


KT MH 8859 9W

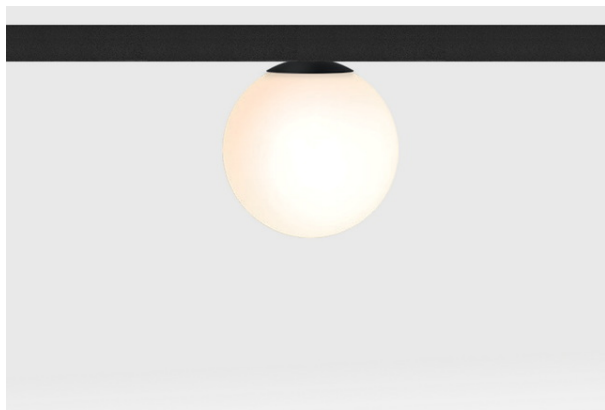

Max power:	9 W
-------------------	-----

Max luminous flux:	290 lm
---------------------------	--------

Basic info

Decorative luminaire, mounted on a magnetic 48 V low voltage track.

Housing: die-cast aluminium, powder coated, RAL color. Microstructure finish.

Lampshell: OPAL, non-yellowing PMMA

Power supply: 48 V DC, no flickering, integrated in the luminaire.

Technical parameters

IP degree	20 IP
L80B10 lifetime	50000 h
Max power	9 W
Max luminous flux	290 lm
Input Voltage	48V DC
Power-supply	on/off or DALI
CCT	2700K, 3000K, 4000K, 5000K, 6000K
Beam angle	300°

Technical drawing

