


LED tape 024-100-10-03 SL 7,2 W/m RGB

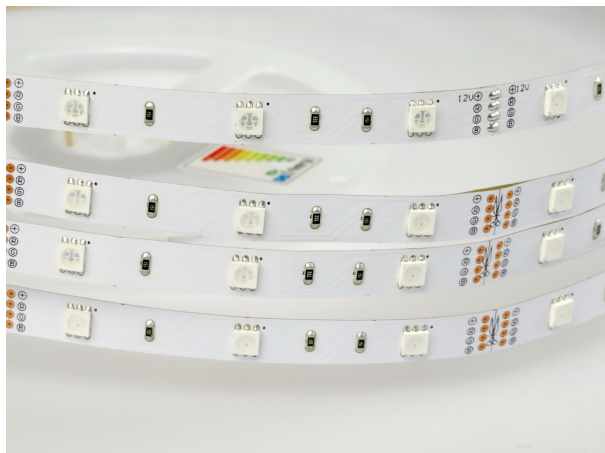

Voltage:	12 V
Power:	7.2 W/m
Luminosity:	25 - 100 lm/m
Qty LED:	30 LED/m
Distance between LED:	33.3 mm
Can be cut into section:	10 cm

Basic info

- SL LINE PRODUCT (PRODUCT LINES: BL-BUDGET, EL-ECONOMIC, SL-STANDARD, PL-PROFESSIONAL)
- SL LINE - PROFITABLE ATTITUDE OF QUALITY/DURABILITY/LUMINOSITY TO PRICE
- MODULES CAN BE SPLIT INTO 10 CM SECTIONS (3LED)
- MODULES CAN BE JOINED INTO LONGER STRINGS (MAXIMUM LENGHT OF LED SECTIONS WITH ONE POWER-SUPPLY POINT: 5M)

Technical parameters

Variant	Red R	Green G	Blue B
Voltage	12 V	12 V	12 V
Power	7.2 W/m	7.2 W/m	7.2 W/m
Luminocity	25 - 100 lm/m	25 - 100 lm/m	25 - 100 lm/m
Qty LED	30 LED/m	30 LED/m	30 LED/m
Distance between LED	33.3 mm	33.3 mm	33.3 mm
Can be cut into section	10 cm	10 cm	10 cm
Power of single LED	0.24 W	0.24 W	0.24 W
A/m	0.6 A/m	0.6 A/m	0.6 A/m
Width	10 mm	10 mm	10 mm
Height	2.5 mm	2.5 mm	2.5 mm
Wavelength scope	475 - 635 nm	475 - 635 nm	475 - 635 nm
Beam angle	120 °	120 °	120 °
Minimum operating temperature	-25 °C	-25 °C	-25 °C
Maximum Operating temperature	60 °C	60 °C	60 °C
Minimum storage temperature	-40 °C	-40 °C	-40 °C
Maximum storage temperature	80 °C	80 °C	80 °C
IP degree	20 IP	20 IP	20 IP

Technical drawing

