


PDS-4-PLUS anodized profile HS cover

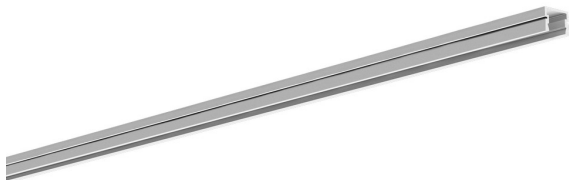

Basic info

PDS4-ALU profile is designed to build low lighting fixtures for universal use. It should be mainly used to illuminate the interiors of e.g. cupboards, stairs, shop windows, etc. The profile is made of high-quality aluminum. If you apply densely distributed LEDs and frosted HS cover (min. 140LED/m) or LIGER (min. 120LED/m), you can obtain a single line of light. Mount the profile to the substrate using double-sided adhesive tape or mounting brackets, which ensures easy and secure installation on surfaces that are not necessarily perfectly flat. When mounting in drywall, fix the profile using special PDS surface springs.

Technical parameters

Variant	mleczna	przezroczysta
IP degree	20 IP	20 IP

Technical drawing

