


45-ALU profile HS cover

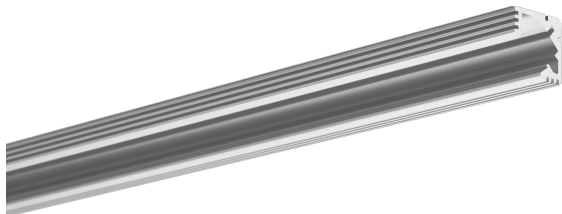

Basic info

45-ALU profile is designed to build low lighting fixtures for universal use. It should be mainly used to illuminate the interiors of e.g. cupboards, stairs, shop windows, etc. This profile directs the light beam at an angle of 45° so you can achieve the effect of a mild accent illumination and avoid glare. The profile is made of high-quality aluminum. The source of light is a LED strip - max. 10,8 mm wide. If you apply densely distributed LEDs and frosted HS cover (min. 140LED/m) or LIGER (min. 120LED/m), you can obtain a single line of light.

Technical parameters

Variant	typu HS mleczna	przezroczysta
IP degree	20 IP	20 IP

Technical drawing

