


REGULOR profile

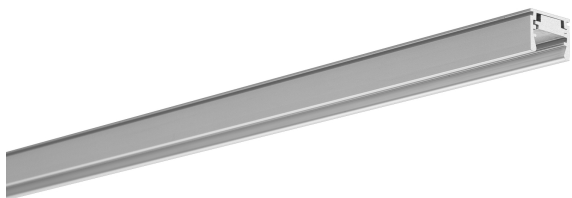

Basic info

REGULOR profile is designed for the construction of fixtures providing a light beam of 10°; 30°; 60°; 90°. A suitable angle of illumination is achieved thanks to the use of a lens cap and regulation performed by inserting a pad into the corresponding notches inside the profile. If the two above conditions are served, you will obtain the following lighting angles: 10 deg. (without the pad) and 30 deg., 60 deg. or 90 deg. (depending on how the pad is set). Mount the profile to the substrate using double-sided adhesive tape or mounting brackets, which ensures easy and secure installation on surfaces that are not necessarily perfectly flat. When mounting in drywall, fix the profile using special PDS surface springs

Technical parameters

Variant	przezroczysta
IP degree	20 IP

Technical drawing

