


LIPOD profile HS 22 cover

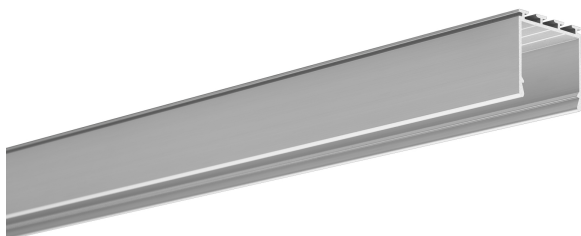

Basic info

Architectural profiles for LED fixtures – dedicated for ceilings and drywall. The height of the profiles was designed in the way, that they can produce a single line of light with two LED strips where the diodes are spaced 15mm apart and a frosted HS 22 cover is used. The source of light is one or two 10 mm-wide LED strips.

Technical parameters

Variant	mleczna	przezroczysta
IP degree	20 IP	20 IP

Technical drawing

