


TEKUS profile

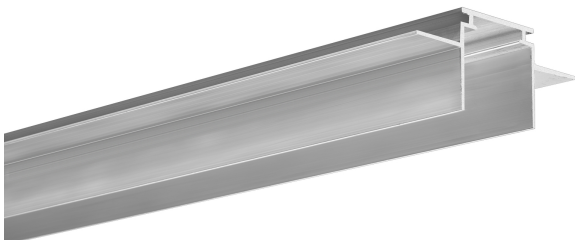

Basic info

The TEKUS profile has the same application as the TEKNIK profile and is dimensionally ready for mounting in drywall of 5/8 " or approx. thickness of 16 mm. This product is addressed mainly to the American market. Technical profile designed for making precise grooves in the surfaces of drywalls and drywall ceilings in order to embed suitable LED profiles in them, e.g. LOKOM, GIZA, GIP, LIPOD. TEKUS profile is mounted together with the construction of drywalls and drywall ceilings.

Technical parameters

IP degree	20 IP
Material	aluminium
Length	1m, 2m, can be cutted on customer's order

Technical drawing

