


TESPO kpl. profile

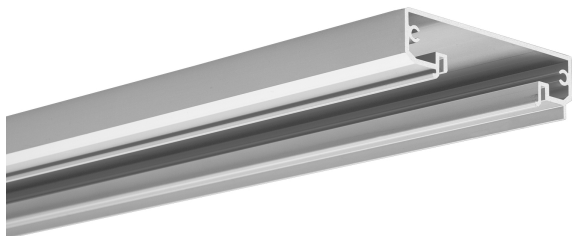

Basic info

TESPO KPL. – mounting track for SEPOD extrusions that can conceal power cables and connections. TESPO KPL. facilitates the building of suspended or surface mounted lighting fixtures. The mounting track is fixed to surface using suitable screws. To connect a SEPOD extrusion with the TESPO KPL. mounting track use a suitable system of fasteners and BLOK springs that offer an easy snap connection. Due to the proper connection of both profiles the fixture is protected against 'self-decoupling', but at the same time preserves the ability to be disassembled, e.g. for maintenance. Use BLOK springs in the mounting profiles in pairs every 70 to 100cm. End caps for the TESPO KPL. mounting track are only available in a metallized, light-tight finish which resembles the color and surface of aluminum. End caps are sold in sets with matching screws.

Technical parameters

IP degree	20 IP
Material	anodized aluminium
Length	1m, 2m, can be cutted on customer's order

Technical drawing

