


IMET profile

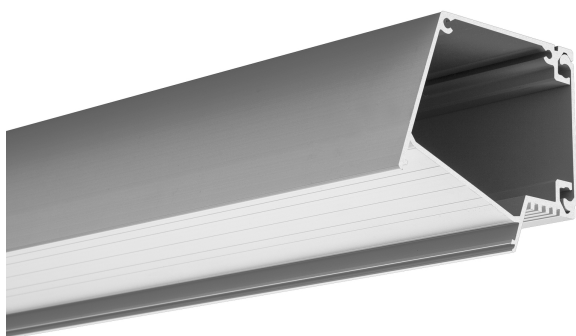

Basic info

SIMPLE INSTALLATION (SNAPS INTO PLACE), SPACE TO CONCEAL POWER SUPPLY AND OTHER ELECTRONIC ELEMENTS. Profile for the construction of wall fixtures (sconce fixtures), with the light beam angle of 30° up or down. It has integrated functions: fitting of LEDs and protecting them with a cover (diffuser), surface mounting, as well as an option of installation of power supply and other electronic components

Technical parameters

Variant	mleczna	przezroczysta
IP degree	20 IP	20 IP

Technical drawing

