


EX-ALU profile

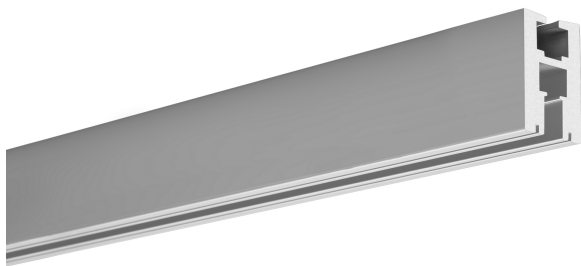

Basic info

Thanks to its unique shape EX-ALU profile is ideal for edge lighting of glass panes or 6mm-thick plastics. Clamping of the glass pane or plastic is carried out by the maximum tightening of expansion bolts, placed on the back part of the profile. These must be positioned at a distance of no more than 16,6 cm from one another; in addition, you must keep a minimum distance of 3 cm from the ends of the extrusion

Technical parameters

IP degree	20 IP
Material	anodized aluminium
Length	1m, 2m

Technical drawing

